PLANT SCHEDULE

CODE	BOTANICAL / COMMON NAME	SIZE	CONTAINER	QTY
DECIDUOUS TREES				
AE-GLOW	Aesculus glabra 'JN Select' / Early Glow™ Ohio Buckeye	2" Cal.	B&B	1
MA-LOLZ	Malus x `Lollizam` / Lollipop Crabapple	1.75" Cal.	B&B	13
EVERGREEN TREES				
PI-MIDW	Picea glauca `JN Select / Midway White Spruce	5-6`	B&B	7
PN-CHAL	Pinus cembra `Chalet` / Chalet Swiss Stone Pine	#15 Cont.	Pot	4
TH-HOLM	Thuja occidentalis `Holmstrup` / Holmstrup Arborvitae	5-6`	B&B	4
SHRUBS				
AR-LOWS	Aronia melanocarpa `UC165` / Low Scape Mound Chokeberry	#3 Cont.	Pot	146
CL HUMM	Clethra alnifolia `Hummingbird` / Hummingbird Summersweet	#3 Cont.	Pot	34
FO-BRNX	Forsythia viridissima `Bronxensis` / Bronx Forsythia	#3 Cont.	Pot	78
FT-GARD	Fothergilla gardenii / Dwarf Fothergilla	#3 Cont.	Pot	16
HY-WEEW	Hydrangea arborescens `NCHA5` / Invincibelle Wee White Hydrangea	#3 Cont.	Pot	79
HY-ETTA	Hydrangea arborescens `NCHA8` / Invincibelle Limetta Hydrangea	#3 Cont.	Pot	2
HY-CRSH	Hydrangea macrophylla `Bailmacfive` / Summer Crush Hydrangea	#3 Cont.	Pot	39
LG-SWFT	Ligustrum vulgare `Swift` / Straight Talk Privet	#3 Cont.	Pot	49
PH-DART	Physocarpus opulifolius `Dart`s Gold` / Dart`s Gold Ninebark	#5 Cont.	Pot	5
SP-ALBA	Spiraea albiflora / Japanese White Spirea	#3 Cont.	Pot	17
SP-GLOW	Spiraea betulifolia `Tor Gold` / Glow Girl Birchleaf Spirea	#2 Cont.	Pot	48
SP-KOTA	Spiraea japonica `Mertyann` / Dakota Goldcharm Spirea	#3 Cont.	Pot	20
SP-CORN	Spiraea japonica `NCSXI` / Double Play Candy Corn Spirea	#3 Cont.	Pot	20
SS-GALA	Symphoricarpos x doorenbosii `Kolmgala` / Galaxy Snowberry	#3 Cont.	Pot	55
SY-DWRF	Syringa meyeri `Palibin` / Dwarf Korean Lilac	#5 Cont.	Pot	3
SY-YANK	Syringa vulgaris `Yankee Doodle` / Yankee Doodle Lilac	#5 Cont.	Pot	1
VB-JUDD	Viburnum x juddii / Judd Viburnum	#5 Cont.	Pot	16
WE-PINK	Weigela florida `VUKOZ90345` / Chezkmark TwoPink Weigela	#3 Cont.	Pot	66
GRASSES				
HAK-AUR	Hakonechloa macra `Aureola` / Golden Variegated Hakonechloa	#1 Cont.	Pot	269
MOL-FLM	Molinia caerulea `Moorflamme` / Moorflamme Moor Grass	#1 Cont.	Pot	147
PERENNIALS				
ACT-PNK	Actaea simplex `Pink Spike` / Pink Spike Snakeroot	#1 Cont.	Pot	13
ALL-BOO	Allium 'Summer Peek-a-Boo' / Peek-a-Boo Ornamental Onion	#1 Cont.	Pot	72
ARM RUB	Armeria maritima 'Rubrifolia' / Red Leaf Sea Thrift	#1 Cont.	Pot	108
ASB-MAG	Astilbe chinensis `Maggie Daley` / Maggie Daley Astilbe	#1 Cont.	Pot	153
ASB-VIS	Astilbe chinensis `Visions` / Visions Astilbe	#1 Cont.	Pot	23
ASB-RHE	Astilbe japonica `Rheinland` / Rheinland Japanese Astilbe	#1 Cont.	Pot	15
ASB-FNL	Astilbe x arendsii `Fanal` / Fanal Astilbe	#1 Cont.	Pot	14
BRU-JAC	Brunnera macrophylla `Jack Frost` / Jack Frost Siberian Bugloss	#1 Cont.	Pot	100
DIA-EBF	Dianthus x 'Wp10 Ven06' / Early Bird Frosty Dianthus	#1 Cont.	Pot	108
HEU-HER	Heuchera x `Hercules` / Hercules Coralbells	#1 Cont.	Pot	151
NEP-KIT	Nepeta x faassenii 'Kitten Around' / Kitten Around Catmint	#1 Cont.	Pot	152
SAL-BUM	Salvia nemorosa 'Bumbleberry' / Bumbleberry Meadow Sage	#1 Cont.	Pot	30
SAL-MAR	Salvia nemorosa `Marcus` / Marcus Woodland Sage	#1 Cont.	Pot	285
SAL-MAY	Salvia x superba `May Night` / May Night Meadow Sage	#1 Cont.	Pot	50
SED-LID	Sedum cauticola 'Lidakense' / Lidakense Purple Stonecrop	#1 Cont.	Pot	286
SED-JOY	Sedum x `Autumn Joy` / Autumn Joy Sedum	#1 Cont.	Pot	23
STA-HUM	Stachys monieri `Hummelo` / Hummelo Betony	#1 Cont.	Pot	12
VIN-BOW	Vinca minor 'Bowles' / Bowles Periwinkle	4.5" Cont.	Pot	324
EVERGREEN SHRUBS				
BU-GMTN	Buxus x `Green Mountain` / Green Mountain Boxwood	#3 Cont.	Pot	36
BU-VLVT	Buxus x `Green Velvet` / Green Velvet Boxwood	#3 Cont.	Pot	353
JU-GRDN	Juniperus procumbens `Nana` / Dwarf Japanese Garden Juniper	#3 Cont.	Pot	49
MI-DECC	Microbiota decussata / Siberian Carpet Cypress	#3 Cont.	Pot	12
TX-EVER	Taxus x media `Everlow` / Everlow Yew	#3 Cont.	Pot	174

LANDSCAPE NOTES

1. DIAMETERS OF PLANT MATERIALS AS DRAWN ARE REPRESENTATIVE OF PLANTS AT OR NEAR MATURITY RATHER THAN AT INITIAL PLANTING SIZES.
2. THE PLANT LIST IS INTENDED AS A GUIDE FOR THE CONTRACTOR. IN THE EVENT OF DISCREPANCY BETWEEN THE NUMBER OF PLANTS ON THE PLANT LIST AND ON THE DRAWING, THE GREATER NUMBER SHALL APPLY.
3. ADJUSTMENTS IN LOCATIONS OF PLANT MATERIALS MAY BE NECESSARY DUE TO NEW OR EXISTING UTILITIES OR SITE OBSTRUCTIONS. REVIEW WITH LANDSCAPE ARCHITECT BEFORE ADJUSTMENTS ARE MADE.
4. ALL SHRUBS OCCURRING IN CONTINUOUS ROW OR FORMAL ARRANGEMENT SHALL HAVE UNIFORM HEIGHT, SPREAD AND HABIT OF GROWTH. FOR GROUNDCOVER LOCATIONS, FILL AREA WITH QUANTITY OF PLANTS DESIGNATED; EVENLY SPACED.
5. PLANTING BEDS SHALL HAVE TWO-INCHES OF PLANTING MIX TILLED INTO THE TOP SIX-INCHES OF BED, PRIOR TO INSTALLATION.
6. PLANTING MIX WILL BE 60% TOPSOIL, 10% PEAT, 10% COMPOST, AND 10% SAND, AND 10% VERMICULITE.
7. MULCH TREES WITH 3-4" DEPTH CHOCOLATE-BROWN DYED, DOUBLE-SHREDDED WOOD MULCH AS NOTED ON PLAN AND PER DETAILS. MULCH SHALL BE HELD BACK A MINIMUM OF 2-INCHES FROM THE PLANT CROWN.
8. ALL PLANTING BEDS WITH STONE MULCH TO BE COVERED WITH CONTINUOUS LAYER OF NON-WOVEN GEOTEXTILE (TYP. TYPAR LANDSCAPE FABLIC) WITH EDGES OVERLAPPING A MINIMUM OF 4 INCHES. STONE MULCH TO BE 2-3" LAYER OF 3/4" TRAP STONE (DARK GRAY), TYP. DRESSER TRAP ROCK INC.
9. INSTALL NEW LAWN AREAS AND REPAIR DAMAGED TURF BEDS USING REINDERS "DELUXE 50 SEED MIX" OR EQUIVALENT. PREPARE TURF AREAS BY TILLING TOP 4" OF SOIL, RAKING AND FINAL GRADING THE SURFACE, REMOVING ALL ROCKS, CONSTRUCTION DEBRIS, AND SOD CLUMP LARGER THAT 1 INCH. INSTALL AT A RATE PER MANUFACTURER.
10. THE CONTRACTOR SHALL MAINTAIN ALL PLANTS, BEDS, AND LAWN FOR A 30 DAY PERIOD AFTER ACCEPTANCE OF THE WORK BY THE ARCHITECT. THIS INCLUDES REGULAR WATERING, WEEDING AND MOWING.
11. THE CONTRACTOR SHALL GUARANTEE ALL PLANT MATERIALS FOR ONE-YEAR FROM DATE OF ACCEPTANCE. BEFORE END OF WARRANTY PERIOD CONTRACTOR SHALL REPLACE ALL TREES, SHRUBS OR PLANTINGS NOT ALIVE OR IN A HEALTHY GROWING CONDITION. RAKE AND RESEED ALL LAWN AREAS WHERE GREATER THAN 1 CF OF SURFACE AREA HAS NOT GERMINATED.

** PLANT QUANTITIES LISTED IN PLANT SCHEDULE REFLECT QUANTITIES FOR ENTIRE CAMPUS, INCLUDING COMPLETED AREA.**

PLANTING NOTES

1. PLANTING HOLE SHALL BE A MINIMUM OF TWO TIMES THE DIAMETER OF THE ROOT BALL, AND EQUAL TO THE DEPTH OF THE ROOT BALL.
2. EXCAVATED SOIL FROM PLANTING HOLE SHALL BE BLENDED WITH PLANTING SOIL MIX AT A RATE OF ONE (1) PART PLANTING SOIL TO TWO (2) PARTS EXCAVATED SOIL.
3. PLANT SO THAT THE ROOT COLLAR WILL BE 1" TO 2" ABOVE EXISTING GRADE.
4. IF PLANTS ARE BALLED AND BURLAP, PLACE PLANT IN HOLE, REMOVE THE STEEL BASKET, CUT AND REMOVE ANY BALLING TWINE, AND PEEL BACK THE TOP TWO THIRDS OF BURLAP SO NONE IS EXPOSED ABOVE GRADE. ENSURE THAT THE PLANT CROWN IS INSTALLED AT THE FINAL GRADE LEVEL.
5. IF PLANT IS POTTED, REMOVE IT FROM THE POT, SCARIFY ANY CIRCLING ROOTS, AND PLACE PLANT INTO HOLE. IN THE EVENT A PLANT IS ROOT BOUND, USE THE BUTTERFLY TECHNIQUE TO OPEN UP THE BALL AND STRAIGHTEN ANY REMAINING CIRCLING ROOTS
6. BACKFILL HOLE WITH PREPARED SOIL, AND MOUND SOIL 2" TO 3" HIGH IN A RING AT THE PERIMETER OF THE EXCAVATED HOLE. WATER AND SMOOTH RING PRIOR TO MULCHING.
7. MULCH WITH 3" OF SHREDDED HARDWOOD MULCH
8. IF STAKING IS REQUIRED FOR TREES TWO STAKES SHALL BE USED ONE ON THE PREVAILING WIND SIDE OF THE TREE, AND THE OTHER STAKE ON THE OPPOSITE SIDE. STAKES SHALL BE FASTENED TO THE TREE USING 1-1/2" NYLON STRAPPING.
9. ALL PERENNIALS SHALL BE DEADHEADED PRIOR TO INSTALLATION.
10. ANY DEAD OR BROKEN BRANCHES SHALL BE REMOVED FROM THE PLANTS BEFORE ACCEPTANCE.
11. PLANTS THAT DO NOT MEET THE MINIMUM REQUIREMENTS OF THE "AMERICAN STANDARD OF NURSERY STOCK" SHALL BE REJECTED AND REPLACEMENT SCHEDULED WITHIN 30 DAYS OF FAILING INSPECTION.
12. ALL PLANTS ARE TO BE TRUE TO GENUS, SPECIES, AND CULTIVAR. IN THE EVENT THAT A CONTRACTOR HAS DIFFICULTY LOCATING A SPECIFIED PLANT, THEY MUST APPROVE ANY CHANGES WITH THE LANDSCAPE ARCHITECT.

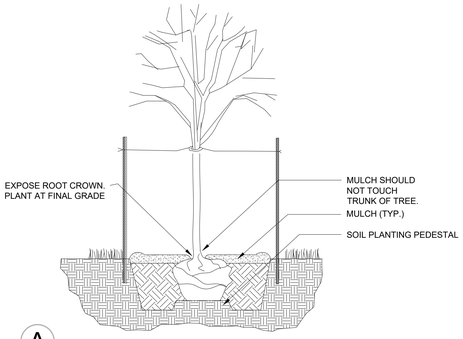

A

TREE PLANTING DETAIL

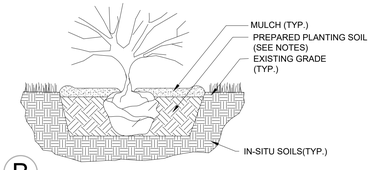

B

SHRUB/PERENNIAL PLANTING DETAIL

JEREMY J. KOX
LANDSCAPE ARCHITECTURE

Site plan and building design and location are based on pre-existing data. JJKLA, LLC does not guarantee accuracy or assume responsibility for any inaccuracies resulting from pre-existing data. Client is urged to have a site survey and topographic plan completed prior to any major site work, grading, or landscape design installation. Use of this plan for any purpose other than intended use may result in undesired results. Consult our office prior to any plan modifications and/or if improper site conditions or errors are discovered.

This drawing and the information contained herein are the intellectual property of JJKLA, LLC. Use of this plan without written permission is a violation of copyright law and may result in legal prosecution of any and all parties involved. Copyright may be purchased in accordance with the corporate bylaws. Clients may use this plan and all information contained herein in accordance with their written design contract. Written dimensions on this plan shall have precedent over scaled dimensions.

LANDSCAPE ARCHITECTURE
LAND USE PLANNING
PROJECT MANAGEMENT
SUSTAINABLE SOLUTIONS

office.1 920.371.3428
office.2 920.740.6231

DO NOT SCALE

© 2024
Jeremy J. Kox Landscape Architecture, LLC

BREWSTER VILLAGE LANDSCAPE Renovations
3300 W Brewster
Appleton, Wisconsin 54914

REVISED:

DATE: 14-MAR-2024
PHONE NO.: 000.000.0000
EMAIL: emailaddress@here.com
SCALE: 1" = 20'- 0"
DRAWN BY: Jeremy J. Kox, PLA
SHEET TITLE: SCHEDULE, NOTES, AND DETAILS
SHEET NO.: L-2
JOB #: 24024
FILE NO.: 024-0240